

# Conserver<sup>®</sup> XL-E

Project \_\_\_\_\_  
Item \_\_\_\_\_  
Quantity \_\_\_\_\_  
CSI Section 11400  
Approval \_\_\_\_\_  
Date \_\_\_\_\_

Conserver<sup>®</sup> XL-E

## Models

### Conserver<sup>®</sup> XL-E



## Standard Features

- Electromechanical timer
- Internal sump design
- Built-in waste accumulator
- 3" (76 mm) stainless steel adjustable bullet feet
- Delimer switch for easy removal of hard water deposits
- Removable scrap screen
- Air gap instead of vacuum breaker
- Door switch
- Convenient top mounted controls
- Auto start
- Interchangeable upper and lower stainless steel wash/rinse arms
- Wash thermometer
- Low product indicator light

## Mandatory Specs

Specify voltage \_\_\_\_\_

## Options

- ☐ Water Hammer Arrestor
- ☐ Scaltrol
- ☐ False Panel
- ☐ Flanged Feet
- ☐ Audible Low Product Alarm

## Accessories

- ☐ 36-Compartment Rack
  - ☐ 4-1/8" tall (105 mm)
  - ☐ 5-5/8" tall (143 mm)
  - ☐ 7" tall (178 mm)
- ☐ Combination Rack
- ☐ Peg Rack

## Specifications

Uses 1.02 gallons (3.9 liters) water per rack

39 racks per hour (Normal cycle)

Single point electrical connection

Self-draining stainless steel pump eliminates soil/detergent carryover between wash and rinse cycles

Dump and fill feature disposes of dirty water, replacing it with a fresh water rinse every cycle

Field convertible from straight to corner and corner to straight for flexible installations and applications

18-1/2" (470 mm) vertical inside clearance

Built-in chemical pumps and priming switches

Large removable scrap screen

Durable stainless steel construction









Warewashing Systems

# Conservor® XL-E

## Legend:

E1: Main Electrical Connection (1-1/8" DIA Hole)  
W: Main Inlet Water Connection (1/2" NPT - Female)  
D: Drain Connection (2" NPT - Male)  
DET: Detergent Bulkhead Access (7/8" DIA Hole)  
SAN: Sanitizer Inlet  
RA: Rinse Aid Inlet

ALL DIMENSIONS ARE ±1/2"

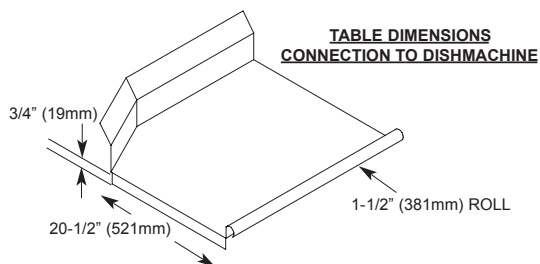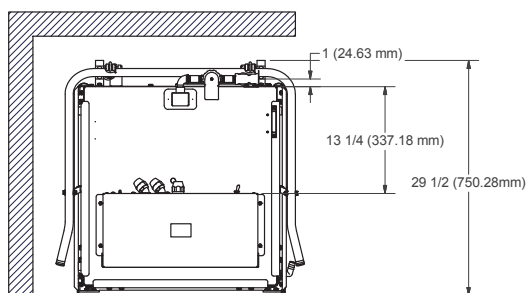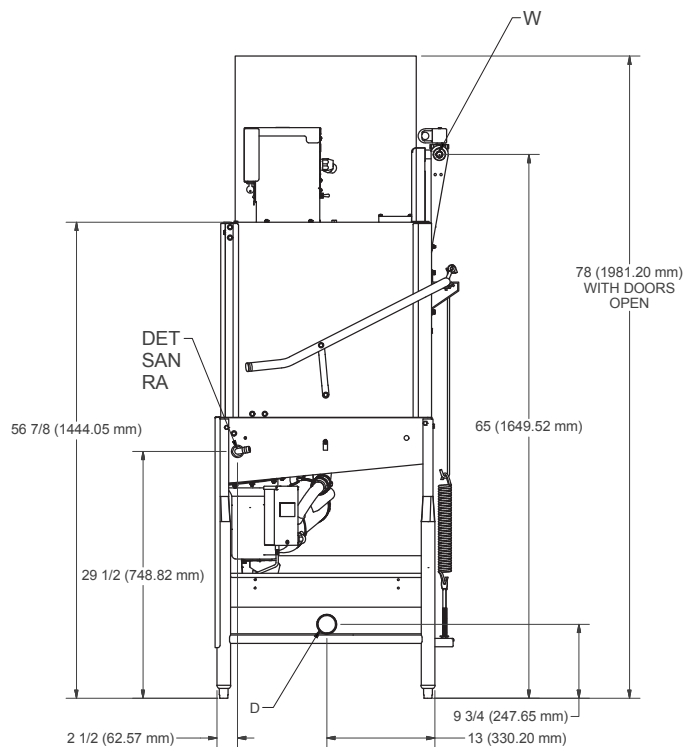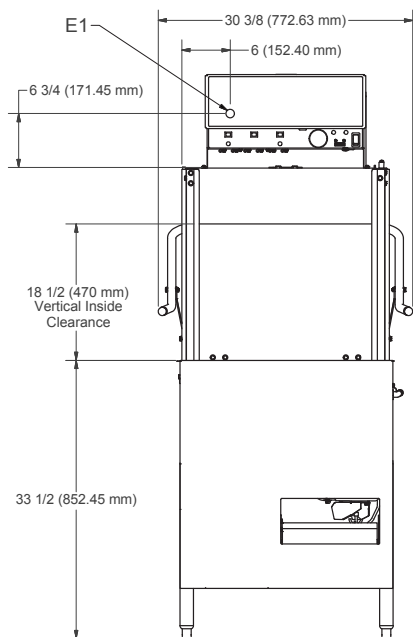

MODEL NO.	MACHINE DIMENSIONS				DRAIN HEIGHT	SHIPPING INFORMATION					
	HEIGHT	WIDTH	WIDTH BETWEEN DISHTABLES	DEPTH		WEIGHT	CLASS	CUBE	HEIGHT	WIDTH	DEPTH
Conservor® XL-E	68-1/2" (1740 mm)	30-3/8" (772 mm)	25-1/4" (641 mm)	29-1/2" (749 mm)	9-3/4" (248 mm)	241 lbs (109 kg)	92.5	64.9 cu. ft.	79" (2007 mm)	33" (838 mm)	43" (1092 mm)

## POWER REQUIREMENTS

Electrical Requirement	115V/60HZ/1PH - 11.4A
Service Breaker Size	15A

## WATER REQUIREMENTS

	MINIMUM	RECOMMENDED
Inlet Temperature	120°F (49 °C)	140°F (60 °C)
Wash Operating Temperature	120°F (49 °C)	140°F (60 °C)
Rinse Operating Temperature	120°F (49 °C)	140°F (60 °C)

## PERFORMANCE CAPABILITIES

Flow Pressure (PSI)	15
Wash Pump Motor Horsepower	1
Pump Capacity (GPM)	55
Minimum Chlorine Required (PPM)	50

HOW TO SPECIFY: Conservor® XL-E

## Jackson WWS, Inc.

Shipping Address: 6209 North U.S. Highway 25E, Gray, KY 40734

Mailing Address: P.O.Box 1060, Barbourville, KY 40906

Telephone: 888-800-5672 • Fax: 606-523-1799

Email: info@jacksonwws.com

07610-004-00-91 [01/05/16]

www.jacksonwws.com

We reserve the right to change specifications in this bulletin without incurring any obligation for equipment previously or subsequently sold.