



AM-50BAJ-(AD)DS

SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN



AM-50BAJ-(AD)DS
01/12/18
Item # 13204

W x D x H

AM-50BAJ / AM-50BAJ-DS

14^{7/8}" x 22^{5/8}"* x 33^{1/2}"

Shipping Dimensions 20^{3/4}" x 30^{1/2}" x 40"

AM-50BAJ-AD / AM-50BAJ-ADDS

14^{7/8}" x 22^{5/8}"* x 31^{1/2}"

Shipping Dimensions 20^{3/4}" x 30^{1/2}" x 38"

* not including handle


(-AD) - ADA Compliant 

(-DS) - Customized Cabinet Door System



AM-50BAJ
Air-Cooled
(Shown)

AM-50BAJ-AD
Air-Cooled
ADA Compliant Unit

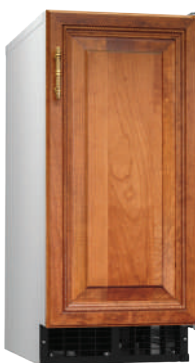

AM-50BAJ-DS*
(Shown)
with Custom Cabinetry

AM-50BAJ-ADDS*
Air-Cooled
ADA Compliant Unit

*Customer responsible for providing cabinetry



Item #: _____

Project: _____

Qty: _____

AIA#: _____

Features

- ▶ **UL approved for outdoor use**
- ▶ **Undercounter design**
- ▶ **Drain pump option available**

- Up to 55 lbs. of ice production per 24 hours
- Fewer moving parts for longer life
- Power switch accessible without panel removal
- Less than 34 inches tall (AM-50BAJ, AM-50BAJ-DS)
- Less than 32 inches tall; ADA Compliant (AM-50BAJ-AD, AM-50BAJ-ADDS)
- Up to 22 lbs. of built-in storage capacity
- Easily disassembled water circuit for easy cleaning
- Front in and out airflow
- Equipped with 6 ft. Cord with NEMA 5-15 Plug
- R-134a Refrigerant

Warranty:


2 Year Parts & Labor on entire machine.

1 Year Parts & Labor on HS-5061 Drain Pump Assembly.

Valid in United States, Canada, Puerto Rico and U.S. Territories. Contact factory for warranty in other countries.

Condenser	Model	ICE PRODUCTION		WATER USAGE		ELECTRICAL				Heat Rejection BTU/hr.	Refrigerant Charge Amount	Net / Ship Weight (lbs.)
		Air / Water Temp Lbs. per 24 hours 70°/50°F 90°/70°F		Potable Gal. per 100 lbs. 90°/70°F	Condenser Gal. per 100 lbs. 90°/70°F	kWh Used per 100 lbs. 90°/70°F	Max. Fuse Sz or HACR Circuit Bkr	Amperage	Voltage			
Air	AM-50BAJ(-DS)	51	35	71.0	N/A	17.0	15A	3.8A	115V/60/1	1,900	4.2oz	88 / 97
Air	AM-50BAJ-AD(-DS)	55	34	63.9	N/A	16.8	15A	3.8A	115V/60/1	1,900	4.2oz	88 / 99

AM Cube Dimensions*



* approximate size in inches, image not to scale

Operating Limits

- Ambient Temp Range 45 - 100°F
- Water Temp Range 45 - 95°F
- Water Pressure 7 - 113 PSIG
- Voltage Range 104-127V

Location

- Allow 15" (38 cm) at front and enough space at rear for water supply and drain connections.
- Location must provide a firm and level foundation.
- Do not place near ovens, grills or other high heat producing equipment.

Parts

- -DS Door Reversal Part - HS-0229
Optional Kit required for (-DS) models
- Side trim kit available
- Accessory - HS-5061 Drain Pump Assembly
- Water filter - H9320-51

Plumbing

- Icemaker Water Supply Line: Minimum 1/4" Nominal ID Copper Water Tubing or Equivalent
- Icemaker Drain Line: Minimum 1/2" Nominal ID Hard Pipe or Equivalent



AM-50BAJ-(AD)DS


SELF-CONTAINED CUBER WITH BUILT-IN STORAGE BIN




AM-50BAJ-(AD)DS
01/12/18
Item # 13204

FRONT VIEW

* -AD models have height of 31.5"

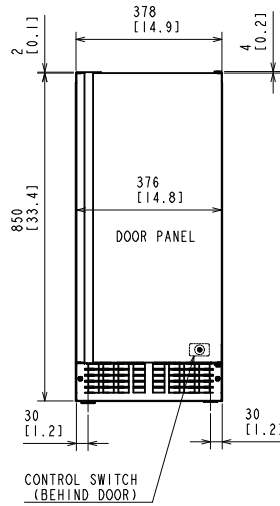

AM-50BAJ*

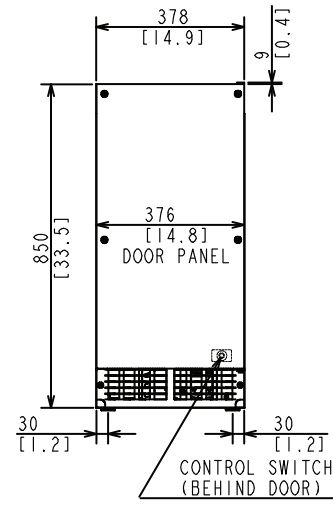


AM-50BAJ-DS*


mm
[inch]

REAR VIEW

* -AD models have height of 31.5"

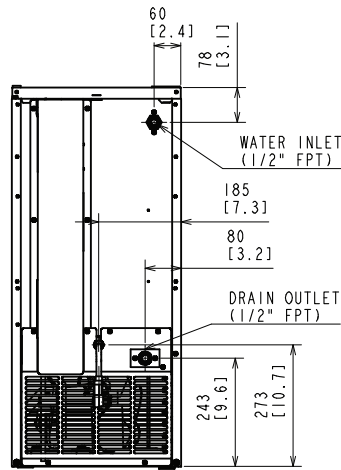


AM-50BAJ*

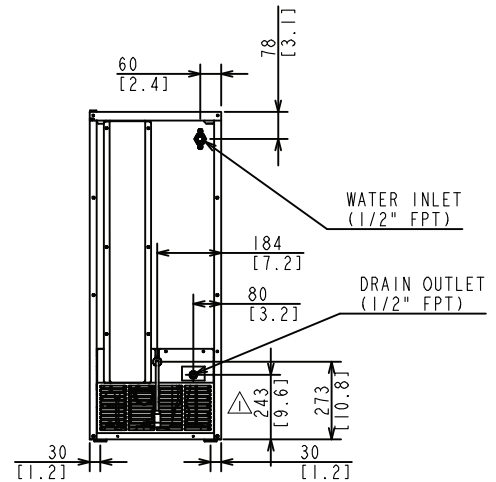


AM-50BAJ-DS*

SIDE VIEW

* -AD models have height of 31.5"

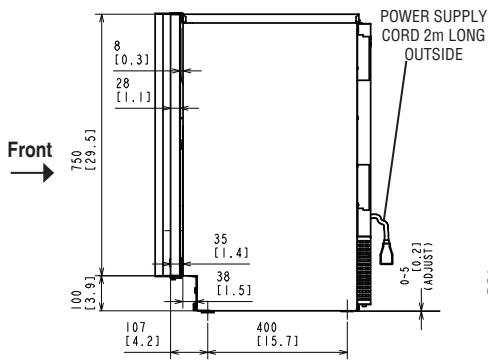


AM-50BAJ*

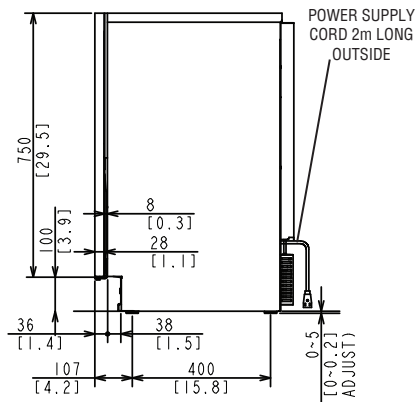


AM-50BAJ-DS*

TOP VIEW

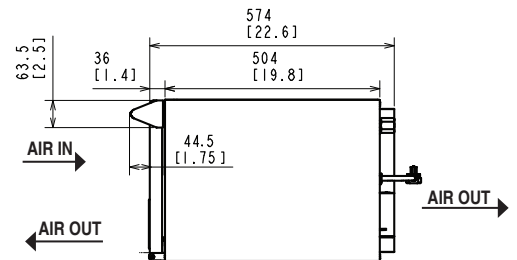

AM-50BAJ*

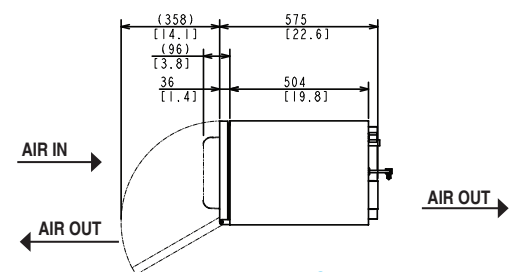

AM-50BAJ-DS*