

KS72

- Stainless steel interior and exterior retains attractive finish longer. Matching aluminium finished back
- Rounded corner design inside of the cabinet makes it easy to clean the inside storage room
- Standard door features:
 Positive seal self-closing door(s) with 90° stay open feature.
 Magnetic door gasket(s) removable without tools for easy of cleaning
- R290 Refrigeration system holds 33°F to 41°F (0.5°C to 5°C) for the best in food preservation.
- Electronic control system:
 Adjustable temperature set point and defrost frequency
 Error codes to diagnose service issues
- Shelf: Adjustable, heavy duty PVC coated shelves.
- Standard heavy-duty casters make it easy to move and clean underneath
- Condensing unit access in back of cabinet, slides out for easy maintenance
- Insulated lid on prep units helps maintain food freshness.

Rough-In Data

Specifications subject to change without notice.

Chart dimensions rounded up to the nearest 1/8" (millimeters rounded up to next whole number).

			Cabinet Dimensions (inches) (mm)			CAP. CU.FT.				
Model	Doors	Shelves	L	D	Н	LITER	HP	Voltage	Amps	NEMA Config.
KS72	3	3	70-3/8 1787	29-1/2 750	42-1/4 1075	15.5 440	1/2+	115/60/1	8.6	5-15P

Plug type varies by country.






CONFORMS TO NSF/ANSI STD. 7


KINTERA EQUIPMENT, LLC


Add: PO BOX 1186, MANSFIELD MA 02048

KS72 Plan View




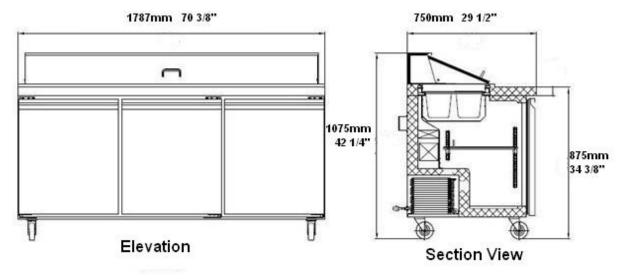

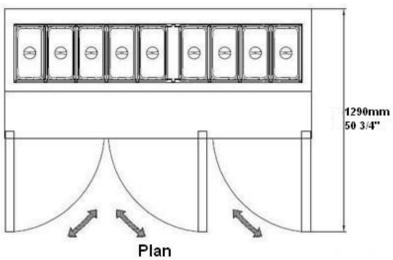



PAN LAYOUTS 1 9 (pcs) 1/3 pans



PAN LAYOUTS 2 18 (pcs) 1/6 pans