



9 Hampshire St., Mansfield, MA 02048  
[www.kinteraequipment.com](http://www.kinteraequipment.com)

Project:	
Model #:	
Item #:	
Available W/H:	Qty:
Approval:	
AIA #:	SIS #:
CSI Section 11400	

## Solid Door Freezer

Reach-In Top Mount  
**KINTERA**

**Model : KTM2F**

### FEATURES & BENEFITS

#### ■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- Early warning alarm program detects issues before malfunction occurs
- Digital display allows for easy monitoring
- Programs interpret the condition of refrigeration systems by self-diagnosis
- Rapid cool-down function (Turbo Freeze)
- Automatic evaporator fan motor delays

#### ■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, KINTERA brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### ■ Cabinet construction

KINTERA model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel top, bottom, and back). Interior has a stainless steel bottom with AL interior (walls, door liners, and top duct).

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

#### ■ LED interior lighting

#### ■ Adjustable, heavy duty, PE (polyethylene) coated wire shelves

#### ■ Self-contained system

#### ■ 4" dia. swivel casters with locks on the front set

#### ■ Door locks

#### ■ Solid and sturdy grille design

#### ■ Top mount compressor

#### ■ Anti-corrosion coated evaporator standard feature

#### ■ Freezer holds -10°F ~ 0°F for the best in food preservation




ENERGY STAR®  
 Qualified

Model	Product ID	Swing Doors	CU./FT.	#of Shelves	HP	AMPS	Crated Weight (lbs.)	L x D* x H† (inches)
<b>KTM2F</b>	<b>919701</b>	<b>2</b>	<b>42.27</b>	<b>6</b>	<b>2/3</b>	<b>5.3</b>	<b>380</b>	<b>51 3/4 x 30 3/4 x 78</b>

# Solid Door Freezer

Reach-In Top Mount  
KINTERA

## Model : KTM2F

ELECTRICAL DATA	
Voltage	115/60/1
Plug Type	 NEMA 5-15P
Full Load Amperes	5.3
Compressor HP	2/3
Cord Length (ft.)	9
Refrigerant	R-290
DIMENSIONAL DATA	
# of Doors	2
Net Capacity (cu. ft.)	42.27
Ext. Length Overall (in.)	51 3/4 (1314mm)
Ext. Depth Overall (in.)	30 3/4 (781mm)
Ext. Height Overall (in.)*	78 (1981mm)
Int. Length Overall (in.)†	47 3/4 (1214mm)
Int. Depth Overall (in.)	24 3/4 (630mm)
Int. Height Overall (in.)	54 1/8 (1373mm)
# of Shelves	6
Shelf Size (L x D) (in.)	23 x 23 1/2
Net Weight (lbs.)	354
Gross Weight (lbs.)	380

Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.


\* Depth does not include 2-3/8" for rear condensate enclosure.

† Height does not include 4-3/4" for caster height.


- **WARRANTY : 2 Year Parts and Labor Warranty**  
Additional 3 Year Warranty on Compressor

## PLAN VIEW

(unit : inch)

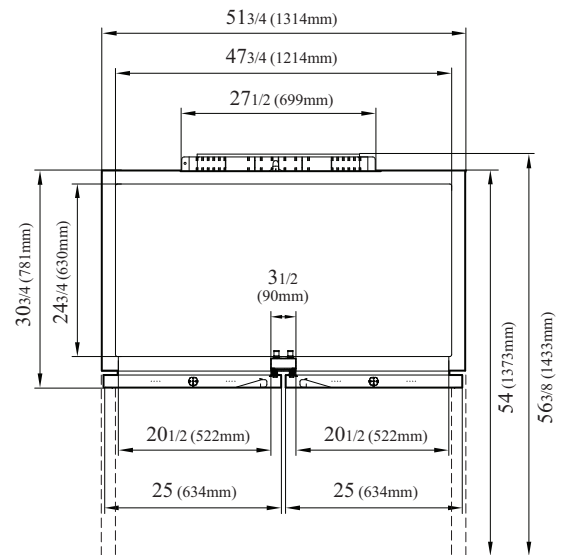

TOP VIEW

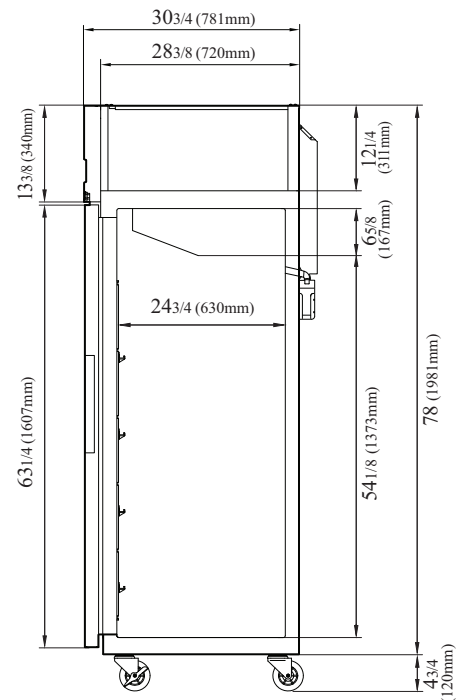

SIDE VIEW

Ver.20240514

NATURAL  
Refrigerant

ETL  
Intertek

ETL  
Intertek

2 YEAR  
WARRANTY

Compressor  
5 YEAR  
WARRANTY

ENERGY STAR®  
Qualified

Warranty: 800-381-7770  
info@kinteraequipment.com