



PIZZA PREP TABLE

DPP44-6-S1 Single Door





Voltage/Frequency 115V/60Hz Refrigerant R290 Type of Defrost Automatic Interial Material Stainless Steel **Exterior Material** Stainless Steel Temperature Range °F 33 ~ 41°F Compressor Power (HP) 1/5

Nema Config. NEMA5-15P

PRODUCT FEATURES

- The compressor is mounted in the back and placed in the coolest possible area; this makes it easily accessible for servicing.
- **B.B.** Digital temperature controls with LED display for precise adjustment and automatic defrosting system.
- * Temperatures in the cabinet range from 33 to 41 degrees Fahrenheit
- Higher Resistance to dust, high quality condenser.
- R290 Natural Refrigerant promotes faster cool down and efficient energy consumption.
- Self-closing doors at 60° with stay open feature.
- Stainless steel interior & exterior, sealed interior floors, and rounded cabinet corners for easy cleaning.
- ☐ 6" deep 1/3 plastic plan included.
- High quality coated stainless adjustable shelves prevent peel and rust.
- 🕰 Lifetime warranty on hinges.
- 5" casters with lock for easy mobility.



HIGH QUALITY STAINLESS STEEL & **ROBUST DESIGN**




Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey 1-800-931-8628


(a) info@dukersusa.com

www.DukersUSA.com

DETAILS & SPECIFICATIONS

PI77A PRFP TABLE DPP44-6-S1

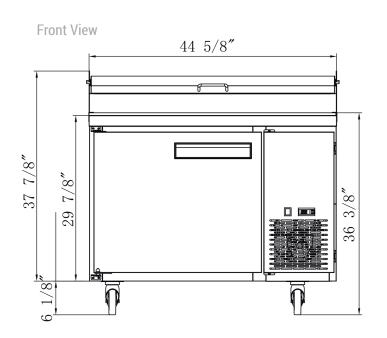


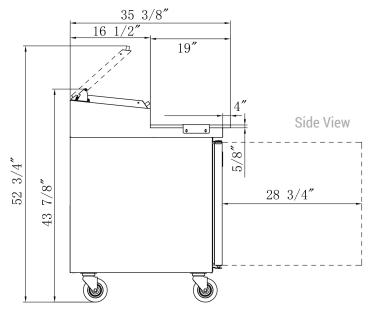

MODEL DPP44-6-S1

Rated Voltage 115V 60Hz Rated Frequency 250W **Total Input Power** 2.2A **Total Current Total Capacity** 9.88 cu ft **Climatic Category** 4-5 **Protection Type Design Pressure High Side 300 PSIG Design Pressure Low Side 150 PSIG** C-Pentane **Insulation Blowing Gas** Refrigerant R290/3.7 oz

1/3 PAN COUNT: 6



MODEL	EXTERNAL DIMENSION WXDXH (INCHES)

PACKAGING DIMENSION PRODUCT NET WXDXH (INCHES)

WEIGHT

40HQ # OF CONTAINER CERT. **SHELVES**

DPP44-6-S1

44 1/4 x 31 1/2 x 43 7/8

46 1/8 x 35 7/8 x 48 3/8

224

46









1



EFRIGERANT

Los Angeles | San Francisco | Dallas Houston | Florida | Chicago | New Jersey



(a) info@dukersusa.com www.DukersUSA.com