

9 Hampshire St., Mansfield, MA 02048 www.kinteraequipment.com

Project:		
Model #:		
Item #:		
Available W/H:		Qty:
Approval:		
AIA#:	SIS #:	
CSI Section 11400		

## Solid Door Freezer

Reach-In Bottom Mount **KINTERA** 

## **Model: KBM1FZ**

#### \_\_\_ FEATURES & BENEFITS =\_\_

#### ■ Digital temperature control & monitor system

- Keeps food products safe by maintaining constant temperatures
- · Alarms that sound when doors are not sealed shut; protect against food spoilage that originates from cold air leaks
- · Early warning alarm program detects issues before malfunction occurs
- · Digital display allows for easy monitoring
- Programs interpret the condition of refrigeration systems by self-diagnosis
- Rapid cool-down function (Turbo Freeze)
- · Automatic evaporator fan motor delays

#### ■ Hydrocarbon refrigerants (R-290)

With innovative and eco-friendly technology, KINTERA brings you hydrocarbon refrigerators designed to meet DOE's Energy Conservation Standards in 2017 and to use EPA's SNAP Program approved HC refrigerants. Hydrocarbon refrigerants do not deplete the ozone layer and have very low contribution to global warming (ODP-0, GWP-3).

#### ■ Cabinet construction

KINTERA model boasts a stainless steel exterior (door) with AL exterior sides (galvanized steel top, bottom, and back). Interior has a stainless steel bottom with AL interior (walls, door liners, and top duct).

#### ■ High-density polyurethane insulation

The entire cabinet structure and solid doors are foamed-in-place using high density, CFC free polyurethane insulation.

- LED interior lighting
- Adjustable, heavy duty, PE (polyethylene) coated wire shelves
- Self-contained system
- 4" dia. swivel casters with locks on the front set
- Door locks
- Solid and sturdy grille design
- Bottom mount compressor
- Anti-corrosion coated evaporator standard feature
- Field reversible door hinge
- Freezer holds -10°F ~ 0°F for the best in food preservation













KBM1FZ	1	21.94	3	1/2	4.9	289	283/4 x 303/4 x 78
Model	Swing Door	CU./FT.	#of Shelves	НР	AMPS	Crated Weight (lbs.)	L x D x H <sup>†</sup> (inches)

(unit: inch)

## Solid Door Freezer

## **Model: KBM1FZ**


ELECTRICAL DATA				
Voltage	115/60/1			
Plug Type	(i) NEMA 5-15P			
Full Load Amperes	4.9			
Compressor HP	1/2			
Cord Length (ft.)	9			
Refrigerant	R-290			
DIMENSIONAL DATA				
# of Doors	1			
Net Capacity (cu. ft.)	21.94			
Ext. Length Overall (in.)	28 <sub>3/4</sub> (730mm)			
Ext. Depth Overall (in.)	303/4 (780mm)			
Ext. Height Overall (in.)†	78 (1982mm)			
Int. Length Overall (in.)	243/4 (630mm)			
Int. Depth Overall (in.)	243/4 (630mm)			
Int. Height Overall (in.)	537/8 (1368mm)			
# of Shelves	3			
Shelf Size (L x D) (in.)	237/8 x 231/8			
Net Weight (lbs.)	271			
Gross Weight (lbs.)	289			


Design and specifications subject to change without notice.

Actual shipping weight may differ due to extra packing materials for product protection.

# ■ WARRANTY: 2 Year Parts and Labor Warranty Additional 3 Year Warranty on Compressor

### PLAN VIEW



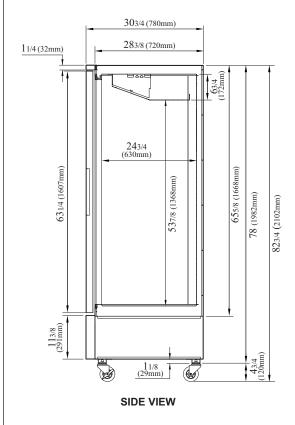

Ver.20250120









**Warranty**: 800-381-7770 info@kinteraequipment.com

<sup>†</sup> Height does not include 4-3/4" for caster height.