



Project Name: \_\_\_\_\_

Item#: \_\_\_\_\_

Quantity: \_\_\_\_\_

# iLume

2791-ILT



Item #	Application	# Of Heating Zones	Peak Power
2791-ILT	Heat lamp	1	300 W

### Description:

The iLume infrared, multi-positioning heat lamp combines modern design with superior functionality for better presentation and performance over traditional heat lamps. Powered by medium heat wave technology, the iLume offers more even heat distribution with greater energy efficiency than your standard heat lamp by penetrating heat energy into the food instead of simply warming the foods surface. The 12" carbon fiber heating element and dual LED illuminators highlight food at 4000K color temperature for a more attractive display.

### Construction & Performance Features:

- Counter top with low profile base
- Long wave heat bulb that evenly distributes heat across food
- 2 LED light settings, Low and High
- 5' power cord with plug
- ON/OFF power Switch
- Capable of Daisy chain up to 4 units on 15-Amp circuit (US ONLY)

### Standard Warranty:

Spring USA offers a one-year from the date of invoice, against manufacturers defects. See SpringUSA.com for more details.

### Agency Listings:

- ETL
- UL 197
- CSA C22.2 #109 (cETL)
- NSF certified



### Available Accessories/Alternate Configurations:

- Induction-ready cookware & serving vessels [Spring USA Catalog]
- Custom tabletop induction featuring SmartStone®
- Cooking utensils [Spring USA Catalog]
- Spring USA warming trays [Spring USA Catalog]



Project Name: \_\_\_\_\_

Item#: \_\_\_\_\_


Quantity: \_\_\_\_\_

\_\_\_\_\_ iLume \_\_\_\_\_

**Electrical Requirements:**

Item#	Volts	Phase	Hertz	Watts	Amps	Plug
2791-ILT	110v - 120V	1	60	300 W	3 AMP	NEMA5-15P

**Key Dimensions:**

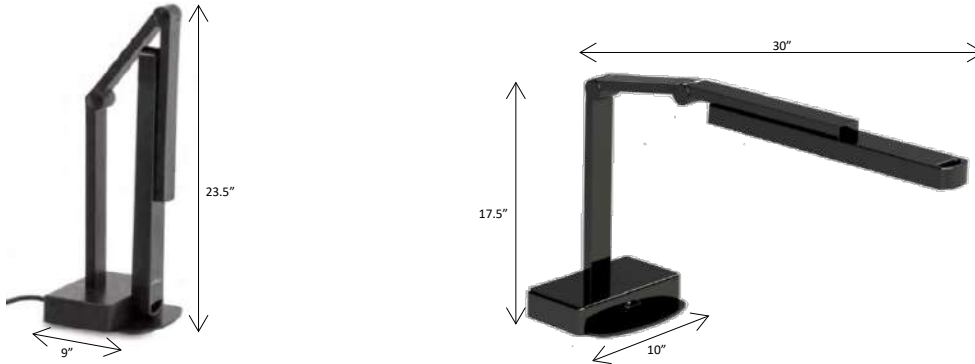

**Shipping Dimensions:**

Single Unit Carton				
Item #	Length	Width	Height	Weight
2791-ILT	15	13	27	23

**Notes & Conditions:**

- Do not daisy chain more than (5) lamps total.
- Food should be at or above serving temperature before being placed under a heat lamp.