



### GAS RANGES

Model	Product ID	Gas	Ovens	Burners
KR4	919584	Natural	1	4

#### STANDARD FEATURES

All ranges are shipped as Natural Gas and have a conversion kit included to convert to Propane.

##### 30,000 BTU cast iron burners

- Individual pilot lights
- Heavy duty 12" x 12" removable cast iron grates
- Push-in knob with efficient Hi-Lo flame control

##### Space Saving Oven

- 30,000 BTU oven burner
- Cool to touch oven door handle
- (2) adjustable oven racks per oven that are easy to remove
- Compression spring door system
- Flame failure safety device
- Adjustable thermostat: 250°F to 550°F

##### Construction

- Heavy duty steel frame
- Stainless steel front - 24 3/5" high backriser & shelf
- Removable crumb tray under the top burners
- 6" adjustable stainless steel legs
- 3/4" NPT rear gas connection

#### WARRANTY

Kintera Gas Cooking Equipment is warranted to be free from defects in material and workmanship under normal use and service for a period of 1 year from the date of original purchase.



**KR4**  
Gas Regulator Included

#### SPECIFICATIONS




The Kintera Commercial Gas Range has powerful 30,000 BTU cast iron burners. Each burner has an individual pilot light - heavy duty 12" x 12" removable cast iron grate and individual instant light control knobs. It is constructed with a stainless steel front, 24 3/5" high backriser and shelf and 6" adjustable stainless steel legs or casters.

The standard oven is powered with a 30,000 BTU burner and comes with two easy to remove oven racks. It includes a no-chip nano porcelain oven liner for easy cleaning and a compression spring door hinge system for durability. The oven thermostat adjusts from 250°F to 550°F and is equipped with a flame failure safety device.



### IMPORTANT INFORMATION

- A pressure regulator is provided with this unit.  
Natural Gas 4" (102 mm) W.C.
- 3/4" NPT (19mm) rear gas connection.

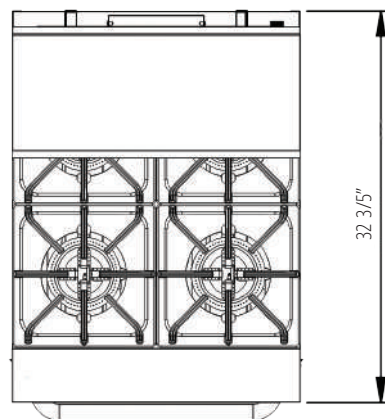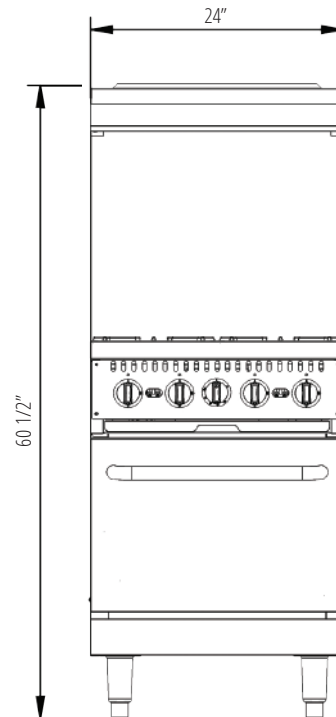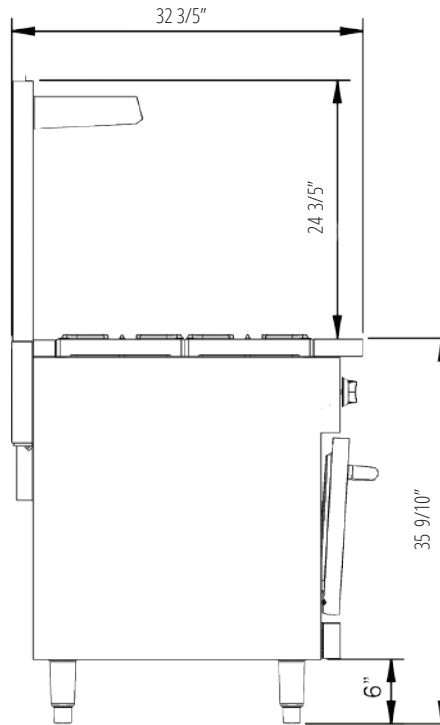

Model	Product ID	Burners	External Dimensions (in)			Internal Oven Dimensions (in)			BTU's (per open burner)	BTU's (per oven)	Total BTU's	Crated Weight (lbs)
			W	D	H	W	D	H				
KR4	919584	4	24	32 3/5	35 9/10 + 24 3/5	20 3/5	25 4/5	13 7/10	30,000	30,000	150,000	356